


3132 Pipe-a-Way Fuse Plugs

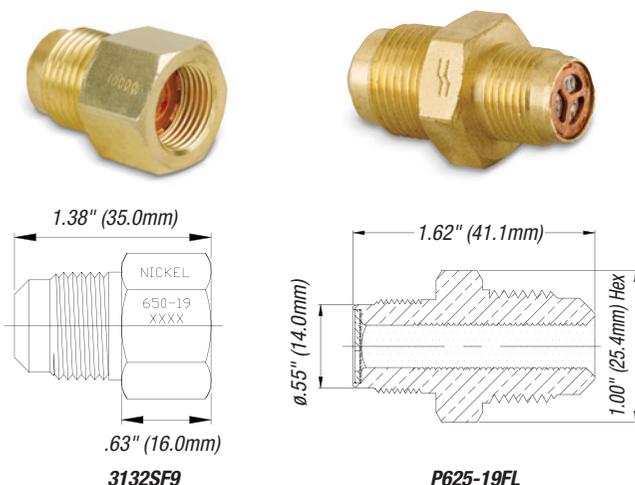

Key Features & Benefits

- 3132: Vented Pressure Relief Valve Assemblies for use in conjunction with 650 external-style relief devices
- P625-19N9-FL-XXW Series: Flared Pressure Relief Devices Assembly for use with 625 internal-style N-style relief devices
- Enable a pipe-a-way configuration
- Provide method of direction for flow or relief

Ordering Information

Sherwood Part Number	Outlet	Inlet	Fusible Metal	Material
3132SF9-XX Series	½" SAE Flared	.650-19	None	Nickel
3132SB9-XX Series	½" SAE Flared	.650-19	212° F	Copper
3132SM9-XX Series	½" SAE Flared	.650-19	165° F	Copper
3132SBF9-XX Series	½" SAE Flared	.650-19	212° F	Nickel
P625-19N9-FL-XXW Series	½" SAE Flared	.625-19	212° F	Nickel

Fuse Plugs



Key Features & Benefits

- All fuse plugs are UL® Listed
- Produced from high-quality brass and steel alloy rod
- Meticulously controlled fusible alloy ensures accurate and consistent melt temperatures
- Fusible alloy is cast into plug body to ensure an extremely strong bond between alloy and plug body
- Fusible plug stamped with fusible metal yield temperature

Ordering Information

Sherwood Part Number	Thread Size	Body Material	Fusible Metal Yield Temp. Nominal	Clear Opening Diameter
FPA165	⅜"-27 NPTF	Brass	165° F	.219"
FPA212	⅜"-27 NPTF	Brass	212° F	.219"
FPB165	¼"-18 NPT	Brass	165° F	.250"
FPB212	¼"-18 NPT	Brass	212° F	.250"
FP201B-NPT	⅜"-27 NPTF	Brass	212° F	.199"
FP202B-BSP	⅜" BSP	Brass	212° F	.199"

NOTE: BSP = British Standard Pipe Thread, NPT = National Pipe Thread, NPTF = National Pipe Threaded Fine.